



RHYME®

www.rhymeaudio.com

RM 212 M-MK IV

SPECIFICATION

Configuration	: Single 12" 2way, full range
Frequency Range (-10 dB)	: 40 Hz - 20 kHz
Frequency Response (± 3 dB)	: 80 Hz - 18 kHz
Horizontal Coverage Angle (-6 dB)	: 90°
Vertical Coverage Angle (-6 dB)	: 90°
Crossover Modes	: Passive
System Sensitivity (1m/1w)	: 97 dB
Maximum SPL ¹	: 129 dB
System Nominal Impedance	: 8 Ohm
Power Rating (RMS / Program / Peak) ²	: 400 / 800 / 1600 Watt

TRANSDUCER

HF Driver	: RM CD 440PK-08F, ferrite, 1 $\frac{3}{4}$ " VC, 1" throat
LF Driver	: RM 75128, 12", ferrite, 75mm VC


PHYSICAL

Enclosure Material	: 15mm Russian Birchply with glued & mechanically fastened joint detail
Finish	: Black Textured
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 650 x 425 x 405 mm (net) 737 x 504 x 483 mm (shipping)
Weight (Net/Shipping)	: 25 / 28 Kg
Mounting & Suspension	: Hanging point, pole mount socket

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @ 80 Hz - 20 kHz, 2Hr/step until break, single unit

BOX

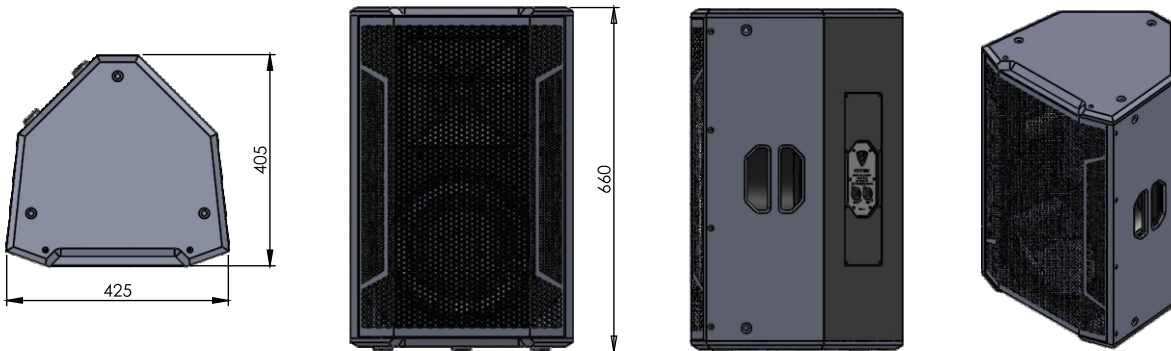

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandés - Surabaya
Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97
Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139