



RHYME®

www.rhymeaudio.com

RM 212 M-MK IV

SPECIFICATION

| | |
|--|-------------------------------|
| Configuration | : Single 12" 2way, full range |
| Frequency Range (-10 dB) | : 40 Hz - 20 kHz |
| Frequency Response (± 3 dB) | : 80 Hz - 18 kHz |
| Horizontal Coverage Angle (-6 dB) | : 90° |
| Vertical Coverage Angle (-6 dB) | : 90° |
| Crossover Modes | : Passive |
| System Sensitivity (1m/1w) | : 97 dB |
| Maximum SPL ¹ | : 129 dB |
| System Nominal Impedance | : 8 Ohm |
| Power Rating (RMS / Program / Peak) ² | : 400 / 800 / 1600 Watt |

TRANSDUCER

| | |
|-----------|---|
| HF Driver | : RM CD 440PK-08F, ferrite, 1 $\frac{3}{4}$ " VC, 1" throat |
| LF Driver | : RM 75128, 12", ferrite, 75mm VC |


PHYSICAL

| | |
|-----------------------|---|
| Enclosure Material | : 15mm Russian Birchply with glued & mechanically fastened joint detail |
| Finish | : Black Textured |
| Input Connector | : Neutrik Speakon NL4 (x2 parallel) |
| Dimension (H x W x D) | : 650 x 425 x 405 mm (net) 737 x 504 x 483 mm (shipping) |
| Weight (Net/Shipping) | : 25 / 28 Kg |
| Mounting & Suspension | : Hanging point, pole mount socket |

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @ 80 Hz - 20 kHz, 2Hr/step until break, single unit

BOX

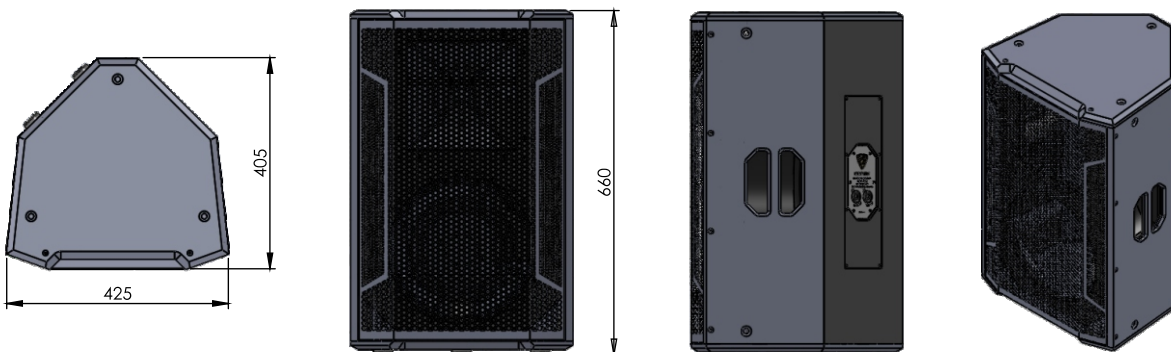

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya
Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97
Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139