



# RHYME®


www.rhymeaudio.com

## RM 128 SB-MK IV


### SPECIFICATION

<b>Configuration</b>	: 2 x 18" Bass Reflex Subwoofer
Frequency Range (-10 dB)	: 30 Hz - 800 Hz
Frequency Response ( $\pm 3$ dB)	: 40 Hz - 400 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: Passive
System Sensitivity (1m/1w)	: 98 dB
Maximum SPL <sup>1</sup>	: 137 dB
System Nominal Impedance	: 4 Ohm
Power Rating (RMS / Program / Peak) <sup>2</sup>	: 2000 / 4000 / 8000 Watt

Respon Frekuensi

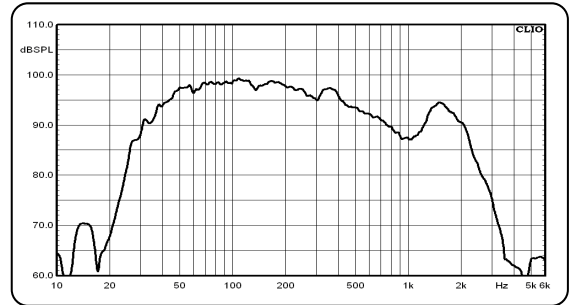

Impedansi

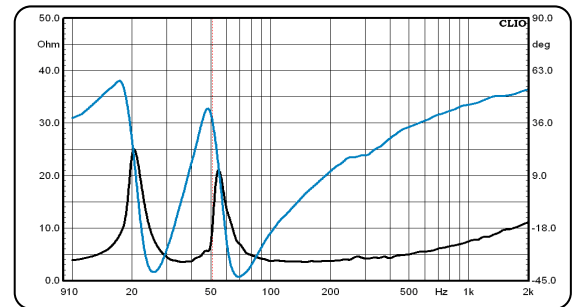

### TRANSDUCER

LF Driver : 2 x 18" RM 113186


### PHYSICAL

Enclosure Material	: 18 mm Russian Birchply with glued & mechanically fastened joint detail
Finish	: Black Textured
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 1052 x 635 x 640 mm (net) 1092 x 765 x 780 mm (shipping)
Weight (Net/Shipping)	: 97 / 103 Kg
Mounting & Suspension	: Pole mount Socket

<sup>1</sup>Calculated based on peak power and measured sensitivity

<sup>2</sup>RMS: pink noise with 6dB crest factor, 12dB BW @ 35 Hz - 350 Hz, 2Hr/step until break, single unit

### BOX

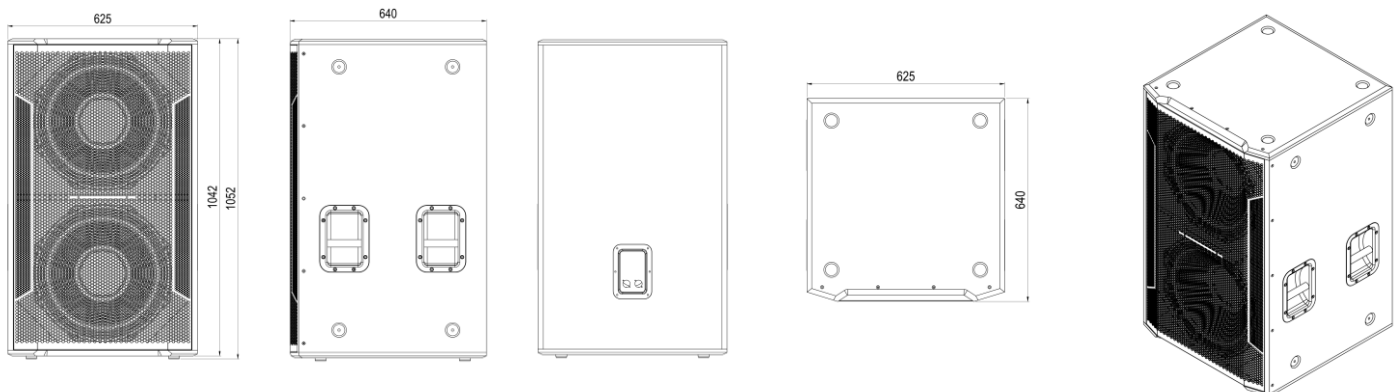

### Showroom :

**Surabaya** : Jl. Margomulyo No. 5, Tandes - Surabaya, Telp. +62-81 231833504

**Jakarta** : Ruko Glodok Plaza Blok F no. 97

Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139