



RHYME®

www.rhymeaudio.com

B212-A

SPEIFICATION

Configuration	:	Active, 1x12" Bass Reflex, 2way Fullrange
Frequency Range (-10dB)	:	57 Hz - 20 kHz
Horizontal coverage Angle (-6dB)	:	90°
Vertical Coverage Angle (-6dB)	:	90°
Maximum SPL Peak	:	126 dB
Crossover Point	:	3000 Hz
Power Rating (RMS)	:	350 W (RMS)
Power Consumption	:	125 W
Input Impedance	:	20 K OHMS
Input Sensitivity	:	1 V
AC Input	:	220 V ~ 50 Hz
Input Connector	:	1x XLR Female


TRANSDUCER

LF Driver	:	127150 DLX, 12", Ferrite, 49.5 mm VC
HF Driver	:	CD 340T1B-08F-Mk1, Ferrite, 34.4 mm VC, 1" throat

PHYSICAL

Enclosure Material	:	MDF P2 15mm
Finish	:	Black Texture
Dimension (HxWxD)	:	635 x 375 x 323 mm (Net) 705 x 435 x 397 mm (Shipping)
Weight (Net/Shipping)	:	20 / 25 Kg
Mounting Suspension	:	Eye Bolt M10 Thread, Pole Mount Socket

BOX

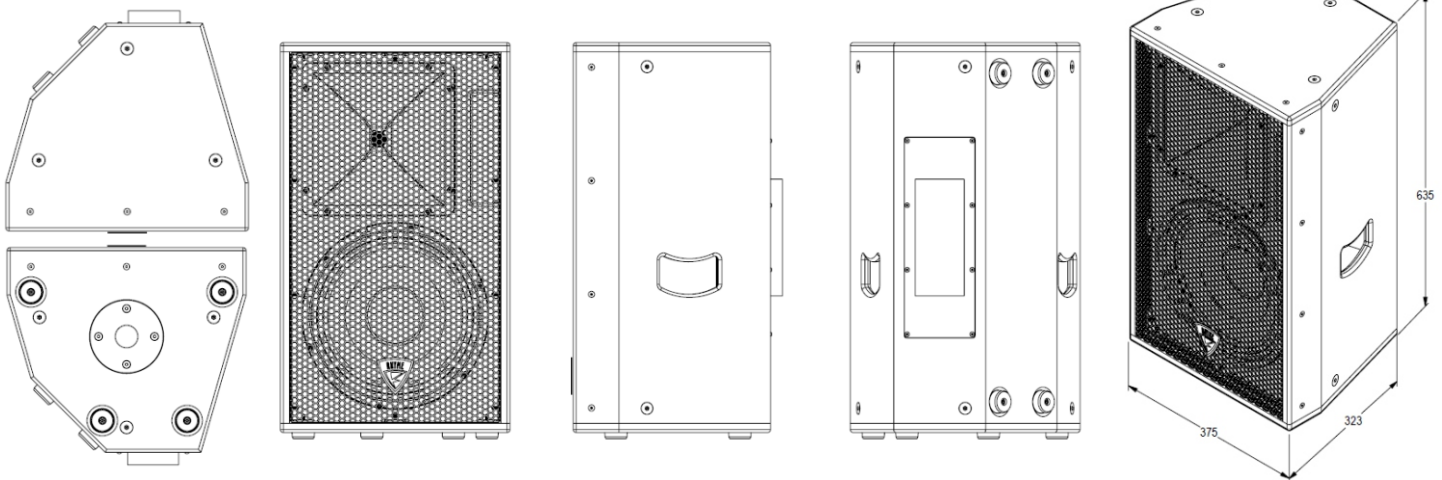

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya, Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97

Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139

SNI

SNI 04-6253-2003
NPB 1-113-005-201503-5

Made In Indonesia | Rev.2 (13.11.2020)