



RHYME®

www.rhymeaudio.com

RM 112 SB-K

SPEIFICATION

Configuration	:	Active, 1x12" Subwoofer
Frequency Range (-10dB)	:	40 Hz - 1 kHz
Horisontal coverage Angle (-6dB)	:	Omni
Vertical Coverage Angle (-6dB)	:	Omni
Maximum SPL Peak	:	120 dB
Power Rating (RMS)	:	300 W (RMS)
Power Consumption	:	132 W
Input Impedance	:	20 K OHMS
Input Sensitivity	:	150 mV
AC Input	:	220 V ~ 50 Hz
Input Connector	:	STEREO RCA


TRANSDUCER

HF Driver	:	RM-H003-04, 12", Ferrite, 50mm VC
-----------	---	-----------------------------------

PHYSICAL

Enclosure Material	:	15mm MDF with glued & mechanically fastened joint detail
Finish	:	Black Vinyl
Dimension (HxWxD)	:	390 x 450 x 420 mm (Net) 460 x 520 x 490 mm (Shipping)
Weight (Net/Shipping)	:	26 / 31 Kg
Mounting Suspension	:	Pole mount socket

BOX

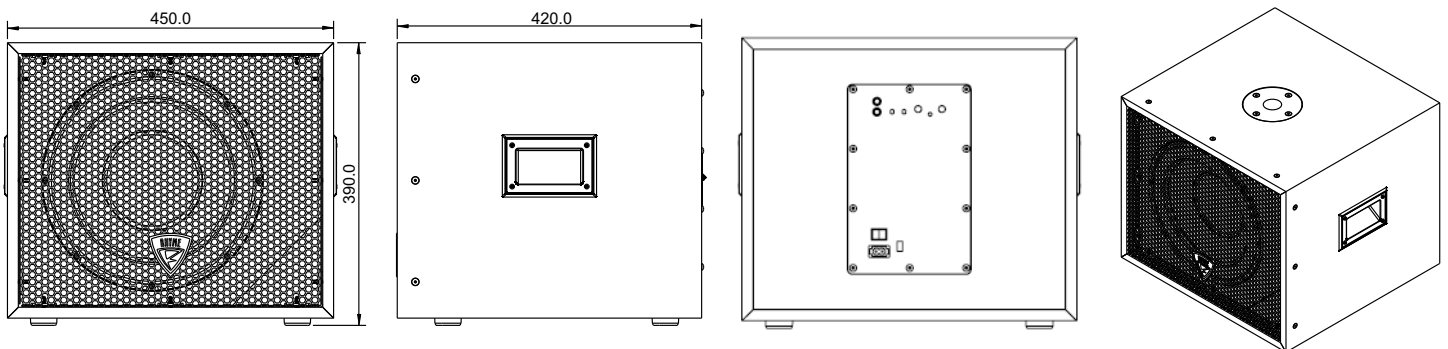

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandés - Surabaya
Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97
Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139

SNI

SNI 04-6253-2003
NPB 1-113-005-201503-5