



RHYME®


www.rhymeaudio.com

RM 151 FSB

SPECIFICATION

Configuration	: Single 15" Vented, Flying Subwoofer
Frequency Range (-10 dB)	: 40 Hz - 2900 Hz
Frequency Response (± 3 dB)	: 60 Hz - 950 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: By pass
System Sensitivity (1m/1w)	: 102 dB
Maximum SPL ¹	: 133 dB
System Nominal Impedance	: 8 Ohm
Power Rating (RMS / Program / Peak) ²	: 350 / 700 / 1400 Watt

Frequency Response

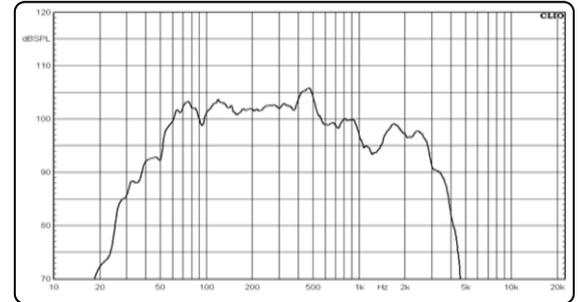


TRANSDUCER

LF Driver : 15" 157165 DLX ACR SERIES, Ferrite, VC65 mm

PHYSICAL

Enclosure Material	: Russian Birchply 18mm
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 470 x 576 x 500 mm (net) 599 x 633 x 617 mm (shipping)
Weight (Net/Shipping)	: 31 / 36 Kg
Mounting Suspension	: Flying Bracket


Impedance

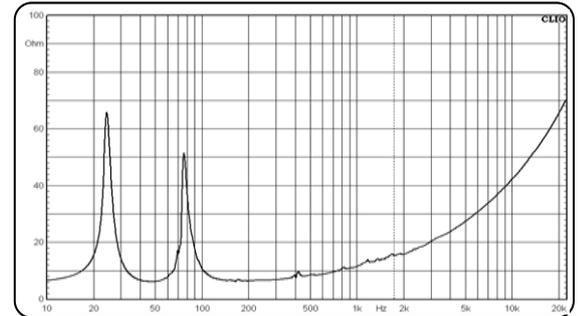

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @ 40 Hz - 400 Hz, 2Hr/step untill break, single unit

BOX

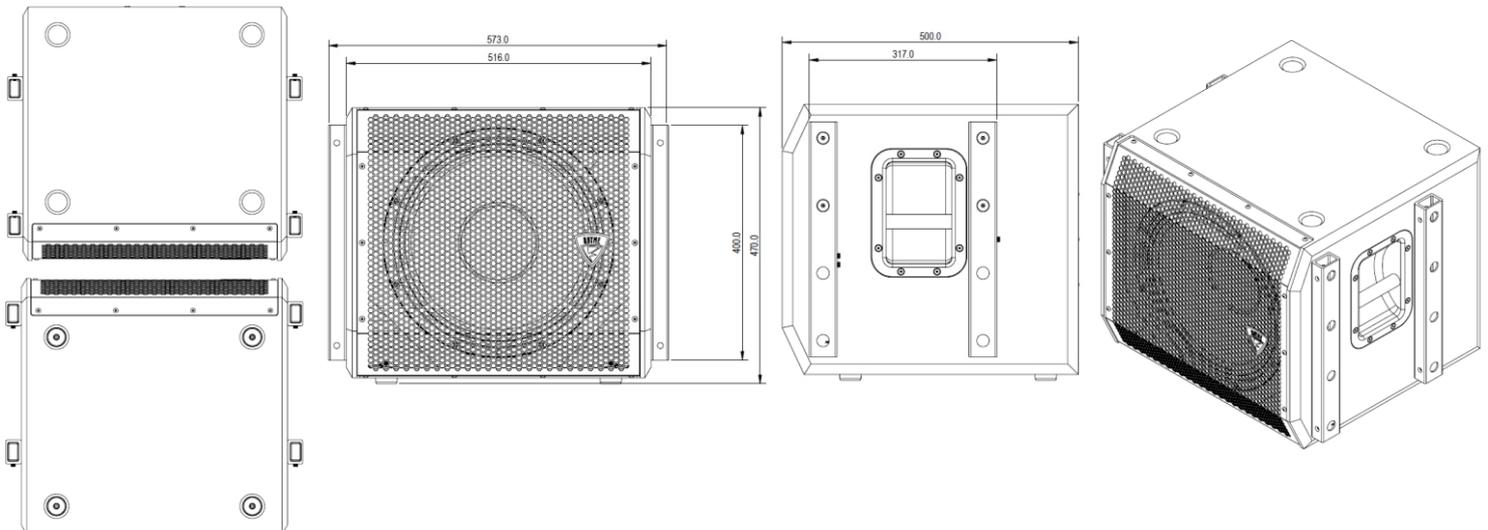

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya, Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97

Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139