



SA39

Slim Array Speaker

SPEKIFICATION

TECHNICAL SPEKIFICATION

Frequency Response	: 180 Hz - 15 kHz
Horizontal Directivity Angle	: 100°
Vertical Directivity Angle	: 5°
System Sensitivity (1m/1w)	: 95 dB
Low Impedance	: 8Ω
100 V line	: 167 Ω (60 W), 330 Ω (30 W), 500 Ω (20 W), 1 kΩ (10 W): Selectable
Power Rating (RMS / Program / Peak) ²	: 225 / 450 / 900 Watt

TRANSDUCER

LF Driver	: RM-39, 3", Ferrite, 20.4 mm VC
-----------	----------------------------------


PHISYCAL SPEKIFICATION

Enclosure material	: 9mm & 12mm MDF
Finish	: Black / White Painting
Input Connector	: Push Terminal
Dimension (H x W x D)	: 955 x 106 x 131 mm (net) : 1100 x 189 x 224 mm (shipping)
Weight (Net/Shipping)	: 9.2 / 11.5 kg
Mounting & Suspension	: Wall Bracket

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @40 Hz - 400 Hz, 2 Hr/step until break, single unit

BOX

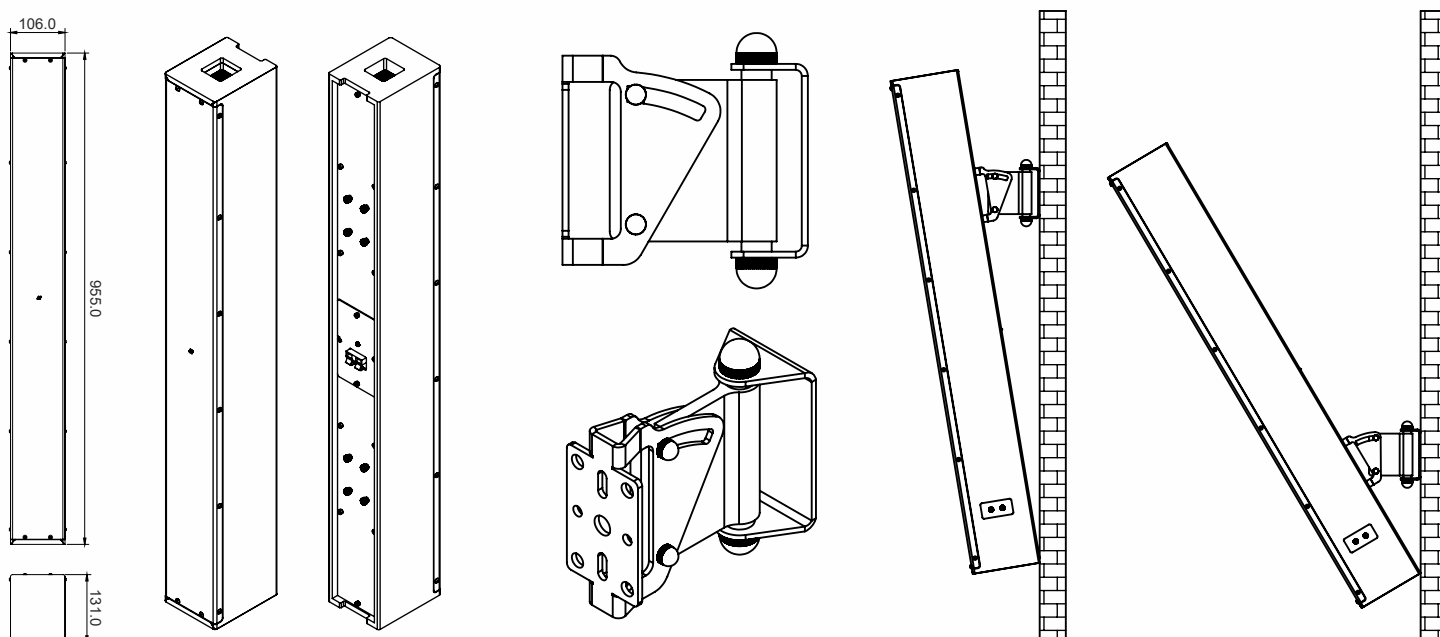

SHOWROOM

Surabaya : Jl. Genteng Besar No.43, (Genteng Electronic Center, Lt.2 No.201-203) - Surabaya | Telp. : +62 81231833504, +62 81217334084

Jakarta : Ruko Glodok Plaza Blok F no. 97 RT 06/RW 06 Mangga Besar - Jakarta Barat | Telp. : +62-21 30525443, 6493139, Fax. : +62-21 6493171