



RHYME®


www.rhymeaudio.com

RM 115 SB MK4


SPECIFICATION

Configuration	: Single 15" Subwoofer
Frequency Range (-10 dB)	: 28 Hz - 1000 Hz
Frequency Response (± 3 dB)	: 36 Hz - 450 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: None, Unpowered
System Sensitivity (1m/1w)	: 99 dB
Maximum SPL ¹	: 135 dB
System Nominal Impedance	: 8 Ohm
Power Rating (RMS / Program / Peak) ²	: 1000 / 2000 / 4000 Watt

Respon Frekuensi

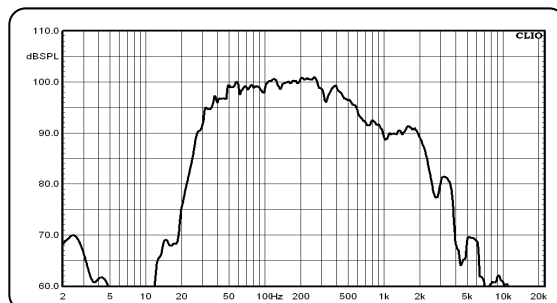

Impedansi

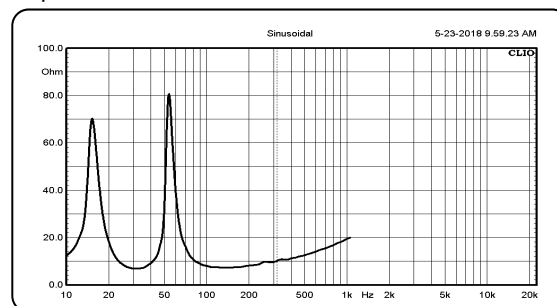

TRANSDUCER

LF Driver : PA-113156 SW FAB, 15", ferrite, 113mm VC






PHYSICAL

Enclosure Material	: 18 mm Russian Birchply with glued & mechanically fastened joint detail
Finish	: Black Textured
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 456 x 510 x 548 mm (net) 556 x 610 x 648 mm (shipping)
Weight (Net/Shipping)	: 39 / 46 Kg
Mounting & Suspension	: Pole mount Socket

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @ 35 Hz - 350 Hz, 2Hr/step untill break, single unit

BOX

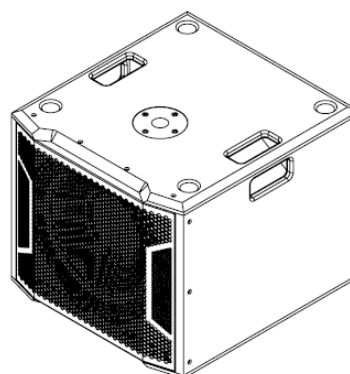

Showroom :

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya,
Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97
Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat,
Telp. +62-21 6493139