



RM II82 SB

Single 18" Loaded Horn Subwoofer

SPECIFICATION

TECHNICAL SPESIFICATION

Frequency Range (-10 dB)	: 32 Hz - 140 Hz
Frequency Response (± 3 dB)	: 37 Hz - 120 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: None, unpowered
System Sensitivity (1W/1M)	: 103 dB
Maximum SPL ¹	: 141 dB
System Nominal Impedance	: 8 Ω
Power Rating (RMS / Program / Peak) ²	: 1900 / 3800 / 7600 Watt

TRANSDUCER

LF Driver	: 1 x PA-113188 SW FAB, 18", ferrite, 113mm VC
-----------	--





PHISYCAL SPESIFICATION

Enclosure material	: 18 mm Russian Birchply
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 1000 x 600 x 671 mm (net)
	: 1098 x 699 x 770 mm (shipping)
Weight (Net/Shipping)	: 79 / 85 kg

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @35 Hz - 350 Hz, 2 Hr/step until break, single unit

BOX

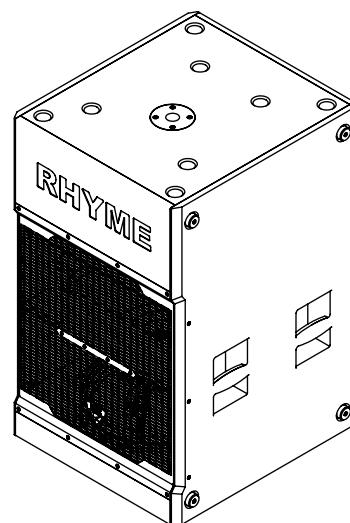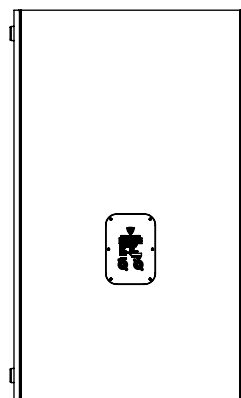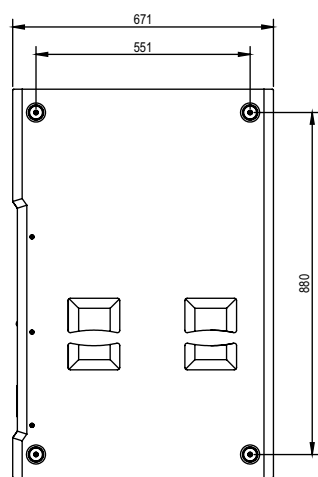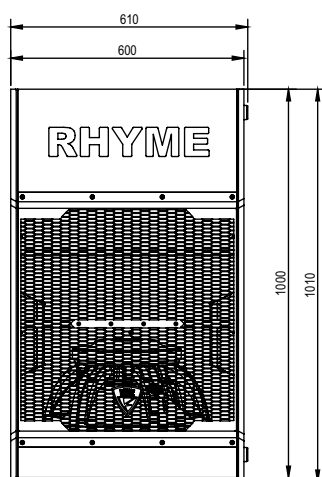

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171