



RHYME®


www.rhymeaudio.com

B118 Mk1

SPECIFICATION

Configuration	: Single 18" Vented
Frequency Range (-10 dB)	: 28 Hz - 2500 Hz
Frequency Response (± 3 dB)	: 38 Hz - 500 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: Bypass
System Sensitivity (1m/1w)	: 100 dB
Maximum SPL ¹	: 131 dB
System Nominal Impedance	: 8 Ohm
Power Rating (RMS / Program / Peak) ²	: 350 / 700 / 1400 Watt

Frequency Response

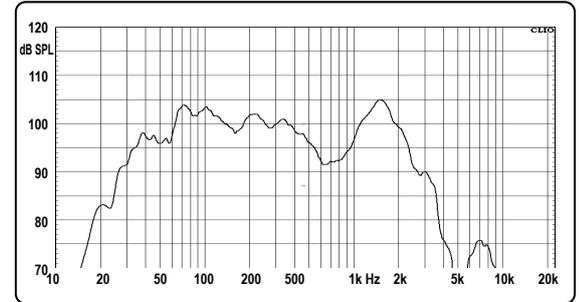


TRANSDUCER

LF Driver : 18" BIANCO18SW350, ferrite, VC65 mm

PHYSICAL

Enclosure Material	: MDF P2 18mm
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 640 x 536 x 595 mm (net) 740 x 636 x 705 mm (shipping)
Weight (Net/Shipping)	: 36 / 41 Kg


Impedance

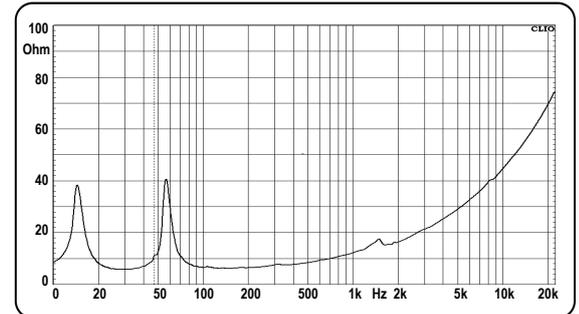

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @ 30 Hz - 300 Hz, 2Hr/step untill break, single unit

BOX

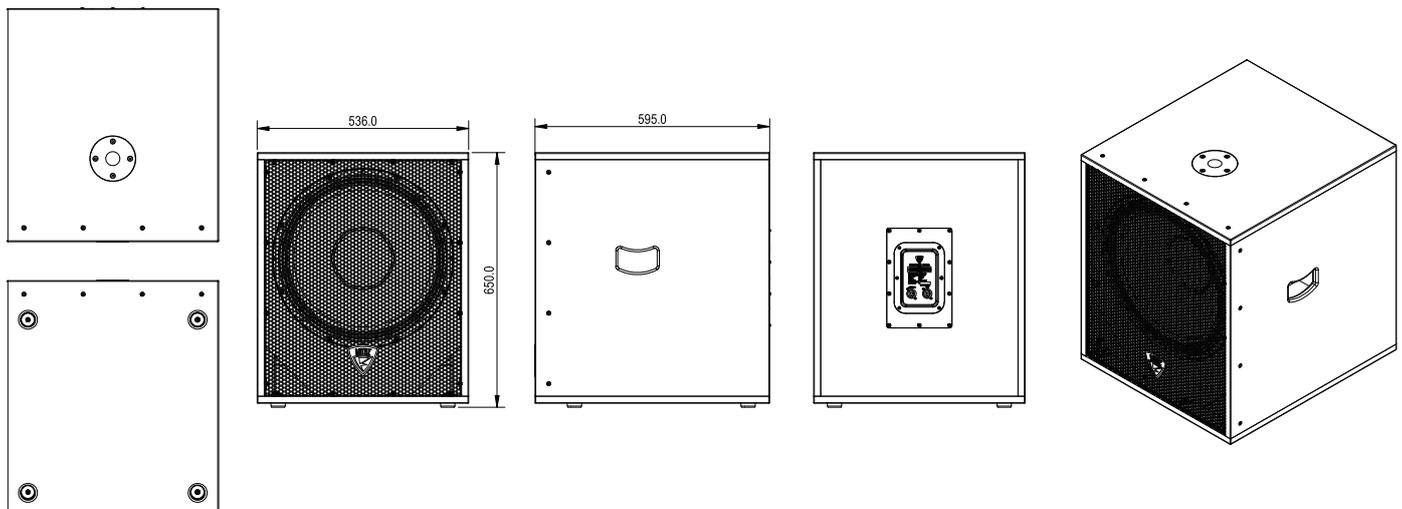

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya, Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97

Jl. Pinangsia Raya, Mangga Besar - Jakarta Barat, Telp. +62-21 6493139