



RM 1283 SB Mk1


Double 18" Bass Reflex Subwoofer

SPECIFICATION

TECHNICAL SPESIFICATION

Frequency Range (-10 dB)	: 26 Hz - 1900 Hz
Frequency Response (± 3 dB)	: 31 Hz - 1500 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: None, unpowered
System Sensitivity (1W/1M)	: 101 dB
Maximum SPL ¹	: 140 dB
System Nominal Impedance	: 4 Ω
Power Rating (RMS / Program / Peak) ²	: 2200 / 4400 / 88000 Watt

Frequency Response

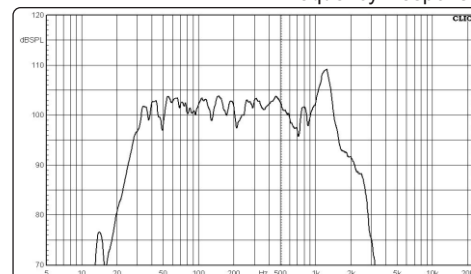


TRANSDUCER

LF Driver	: 2 x PA-127187 SW FAB, 18", ferrite, 127mm VC
-----------	--

PHISYCAL SPESIFICATION

Enclosure material	: 18 mm Russian Birchply
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 1160 x 546 x 680 mm (net) : 1241 x 647 x 784 mm (shipping)
Weight (Net/Shipping)	: 112 / 118 kg


Impedance

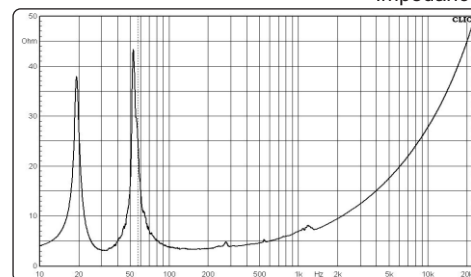

¹Calculated based on peak power and measured sensitivity

²RMS: pink noise with 6dB crest factor, 12dB BW @34 Hz - 340 Hz, 2 Hr/step until break, single unit

BOX

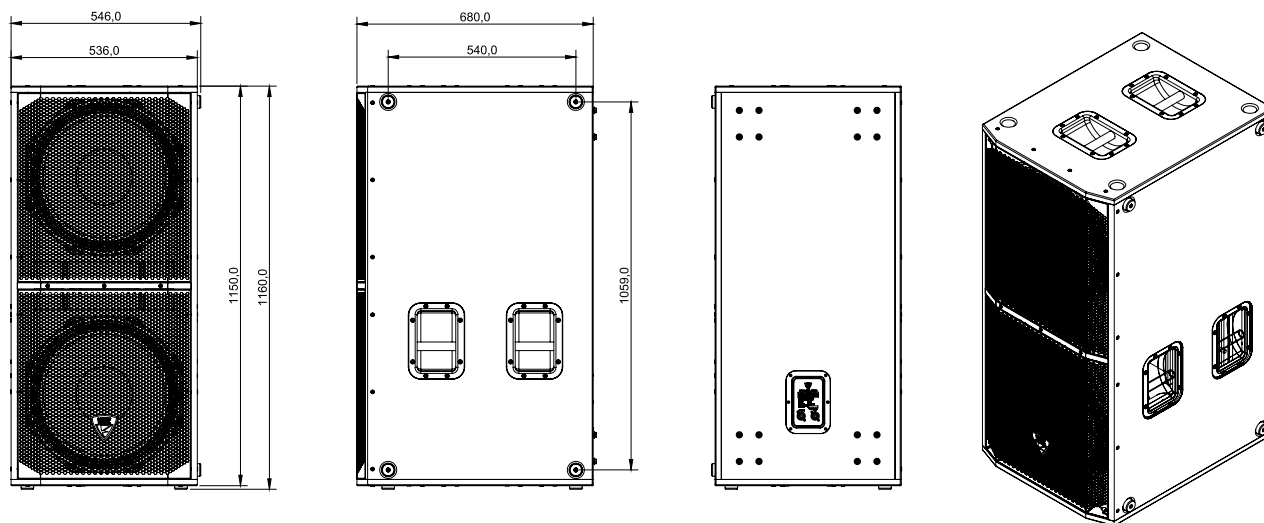

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171