



SP 11510 SB


Single 15" Bass Reflex, Subwoofer

SPECIFICATION

TECHNICAL SPESIFICATION

Frequency Range (-10 dB)	: 30 Hz - 2000 Hz
Frequency Response (± 3 dB)	: 60 Hz - 900 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Modes	: None, Unpowered
System Sensitivity (1W/1M)	: 100 dB
Maximum SPL ¹	: 134 dB
System Nominal Impedance	: 8 Ω
Power Rating (RMS / Program / Peak) ²	: 600 / 1200 / 2400 Watt

Frequency Response

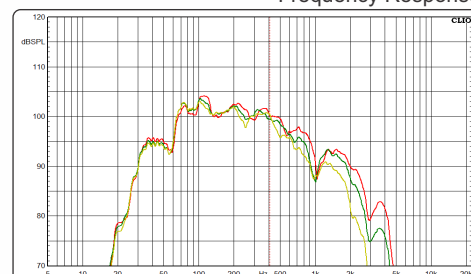


TRANSDUCER

LF Driver	: 1 x 381006-Mk1 DESIBEL, 15", Ferrite, 99.2 mm VC
-----------	--


PHISYCAL SPESIFICATION

Enclosure material	: MDF HMR 18 mm
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 580 x 485 x 502 mm (net) : 707 x 600 x 617 mm (shipping)
Weight (Net/Shipping)	: 34 / 37 kg
Mounting Suspension	: Pole Mount Socket

Impedance

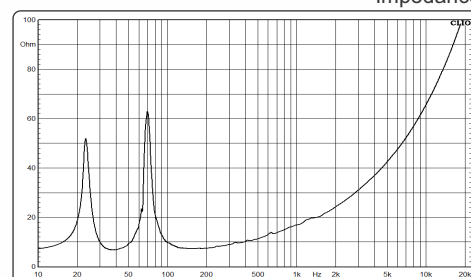¹Calculated based on peak power and measured sensitivity²RMS: pink noise with 6dB crest factor, 12dB BW @36 Hz - 360 Hz, 2 Hr/step until break, single unit

BOX

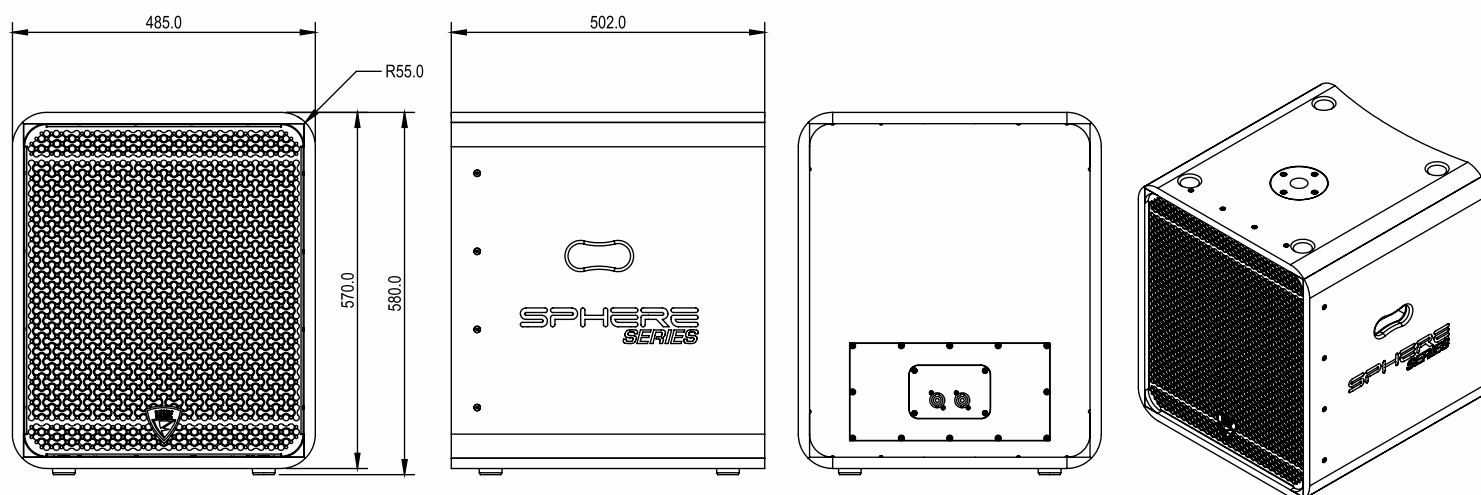

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171