



SP I1510 SB-A

Active Single 15" Bass Reflex, Subwoofer

SNI


SNI 04-6253-2003
NPB 1-113-005-201503-5

SPECIFICATION

TECHNICAL SPESIFICATION

Frequency Range (-10 dB)	: 40 Hz - 380 Hz
Horizontal Coverage Angle (-6 dB)	: Omni
Vertical Coverage Angle (-6 dB)	: Omni
Crossover Point	: LF 50 - 250 Hz
Maximum SPL	: 131 dB
Power Rating (RMS)	: 1450 Watt
Power Consumption	: 33 W
Power Requirements	: 115/230 VAC
Input Connection	: 1 x XLR Female

Frequency Response

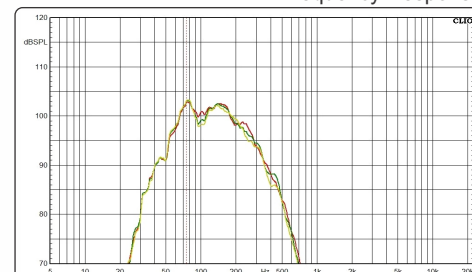


TRANSDUCER

LF Driver	: 1 x 381006-Mk1 DESIBEL, 15", Ferrite, 99.2 mm VC
-----------	--


PHISYCAL SPESIFICATION

Enclosure material	: MDF HMR 18 mm
Finish	: Black Texture
Input Connector	: Neutrik Speakon NL4 (x2 parallel)
Dimension (H x W x D)	: 580 x 485 x 502 mm (net) : 707 x 600 x 617 mm (shipping)
Weight (Net/Shipping)	: 38 / 41 kg
Mounting Suspension	: Pole Mount Socket

Impedance

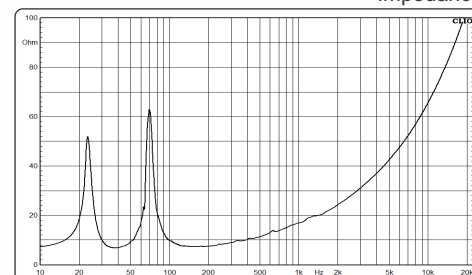

BOX

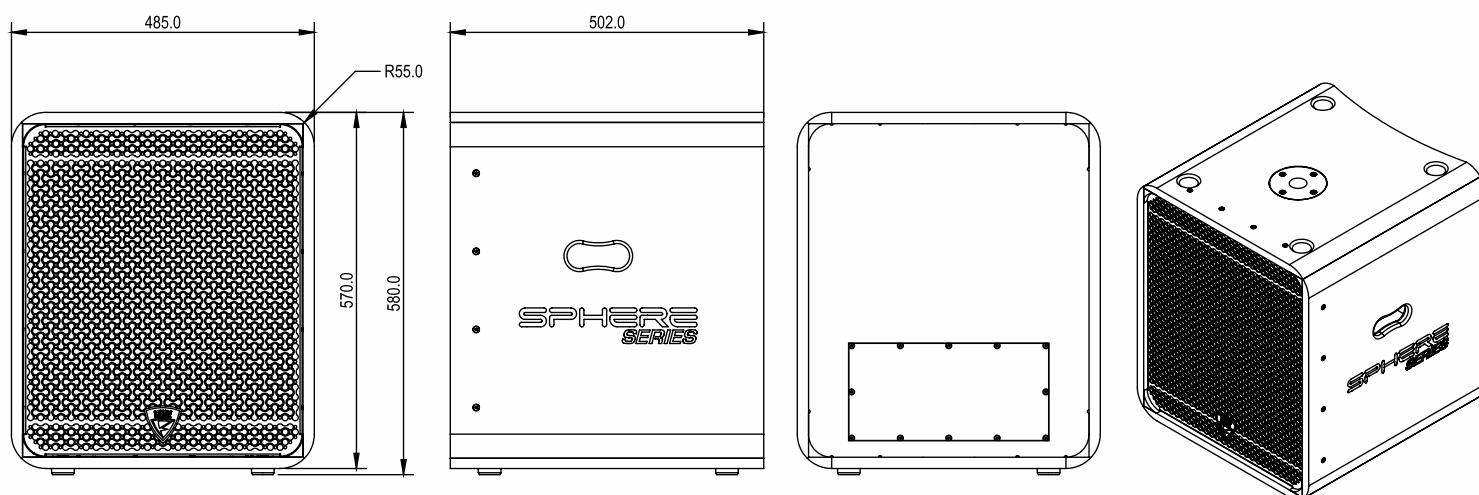

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171