



CS 6 FR

Single 6" Bass Reflex,
Fullrange ceiling speaker with chamber




SPECIFICATION

TECHNICAL SPESIFICATION

Frequency Range (-10 dB)	: 80 Hz - 19 kHz
Frequency Response (± 3 dB)	: 120 Hz - 15 kHz
Horizontal Coverage Angle (-6 dB)	: 120°
Vertical Coverage Angle (-6 dB)	: 120°
Crossover Modes	: -
System Sensitivity (1W/1M)	: 90 dB
Maximum SPL ¹	: 115 dB
System Nominal Impedance	: 8 Ω
Power Rating (RMS / Program / Peak) ²	: 80 / 160 / 320 Watt

Frequency Response

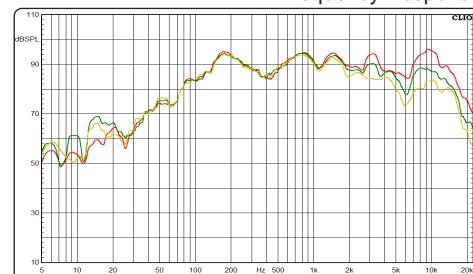


TRANSDUCER

LF Driver	: 6" CS FR, Paper coating with foam dipping edge, ferrite, 25mm VC
-----------	--

PHYSICAL SPESIFICATION

Enclosure material	: ABS
Finish	: Black - White Painting
Input Connector	: Block Terminal
Dimension (H x W x D)	: $\varnothing 248 \times 155$ mm (net) : 308 x 308 x 203 mm (shipping)
Weight (Net/Shipping)	: 1.75 / 2.19 kg
Mounting & Suspension	: Tile bracket or universal support bracket for drop ceiling (ceiling with chamber/backcan)


Impedance

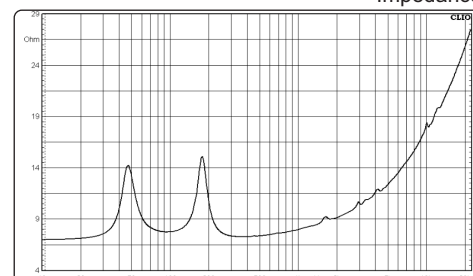

¹Average value from average of SPL and the highest of SPL

²Power handling test with AES standard at low impedance (without trafo)

CEILING SPEAKER

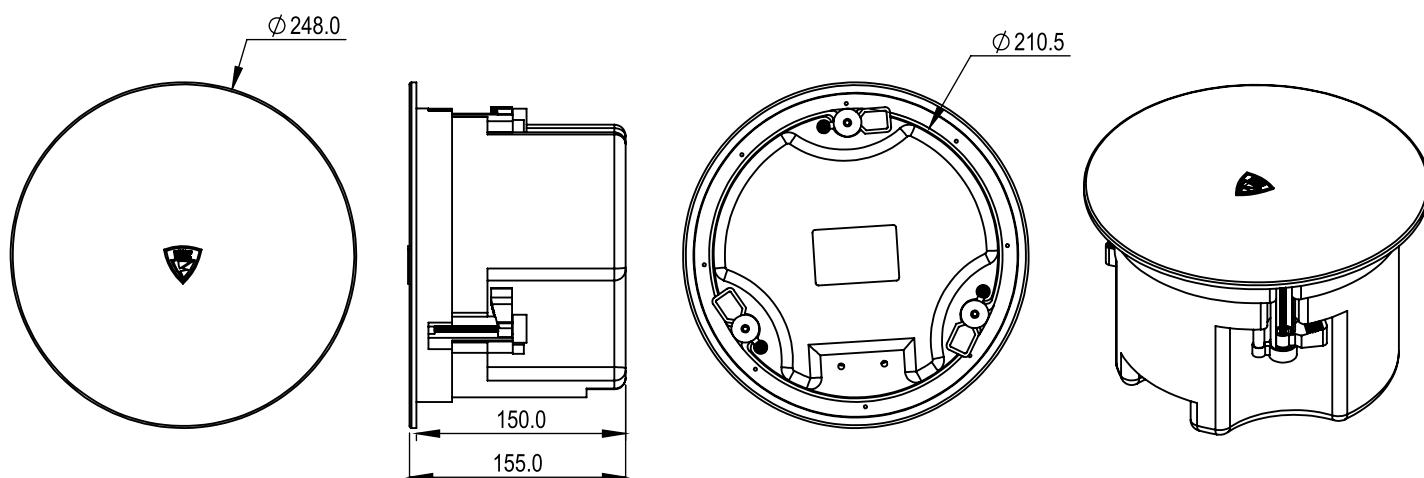

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171